
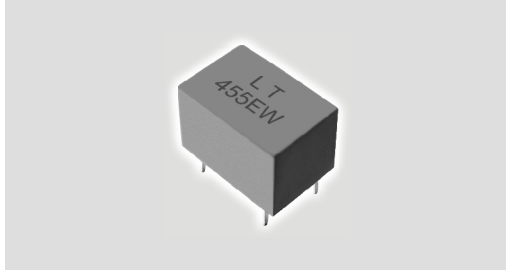




LT455 SERIES
外形尺寸 · DIMENSIONS


1:Input
2,3,4:Ground
5:Output

1:输入
2,3,4:接地
5:输出

LT 455系列通讯机用陶瓷滤波器 · CERAMIC FOR COMMUNICATION

MODEL 型号	CENTER FREQUENCY 中心频率	6DB BAND WIDTH 衰减带宽 (Khz)max	选择性 SELECTIVITY		STOP BAND ATT 455±100KHz 阻带衰减 (dB)min	INSERTION LOSS 插入损耗 (dB)max	IN/OUTPUT IMPEDANCE 输入 / 输出阻抗 (K ω)	
			ATT BAND WIDTH 衰减带宽 (dB) max	ATTUPECIFIED 保证衰减量 (dB) min				
LT455BU	LT455BW	455±2.0	±15	±30	50	4	1.5	
LT455CU	LT455CW	455±2.0	±12.5	±24				
LT455DU	LT455DW	455±2.0	±10	±20				
LT455EU	LT455EW	455±1.5	±7.5	±15		40		6
LT455FU	LT455FW	455±1.5	±6	±12.5				
LT455GU	LT455GW	455±1.5	±4.5	±10				
LT455HU	LT455HW	455±1.5	±3	±9		60		2
LT455IU	LT455IW	455±1.0	±2	±7.5				
LT455HTU	LT455HTW	455±1.0	±3	±9				
LT455ITU	LT455ITW	455±1.0	±2	±7.5				

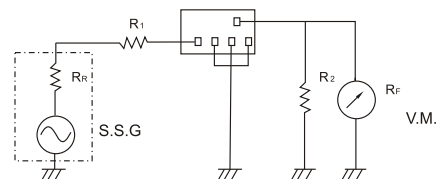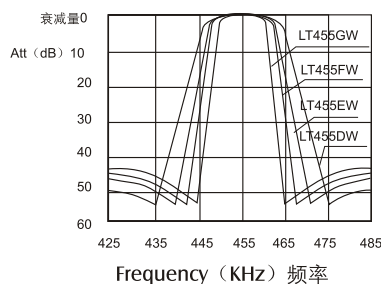特性曲线 · CHARACTERISTICS
测量线路 · TEST CIRCUIT


R_R+ R₁-R₂-Input/output Impedance
R_R+ R₁-R₂-输入 / 输出阻抗