


## ONE PORT SAW RESONATOR

## 外形尺寸 · DIMENSIONS(mm)

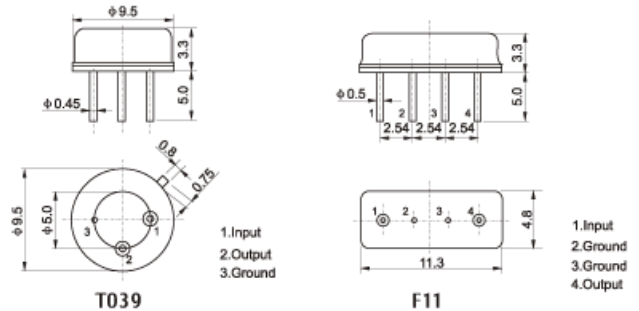

## 声表面波谐振器—单端对 · SAW RESONATOR FOR ALARM AND REMOTE CONTROL - ONE PORT

PART NUMBER 型号	CENTER FREQUENCY (MHz) 中心频率	FREQUENCY TOLERANCE (KHz) 频率精度	INSERTION ATTENUATION (dB) 插入损耗	PACKAGE 封装形式
R224M	224.500	±100	2.5	T039,F11
R260M	260.000	±100	2.5	T039,F11
R297M	297.80	±100	2.5	T039,F11
R303K	303.875	±100	2.5	T039,F11
R303M	303.825	±100	2.5	T039,F11
R304M1	304.300	±100	2.5	T039,F11
R308M	308.500	±100	2.5	T039,F11
R310M	310.000	±100	2.5	T039,F11
R311M	311.063	±100	2.5	T039,F11
R314M	314.500	±100	2.5	T039,F11
R315M	315.000	±100	2.5	T039,F11
R318M	318.000	±100	2.5	T039,F11
R325M	325.000	±100	2.5	T039,F11
R335.1M	335.100	±100	2.5	T039,F11
R340M	340.000	±100	2.5	T039,F11
R345M	345.000	±100	2.5	T039,F11
R360M	360.000	±100	2.5	T039,F11
R372.5M	372.500	±100	2.5	T039,F11
R395M	395.000	±75	2.5	T039,F11
R403M	403.050	±75	2.5	T039,F11
R418M	418.000	±75	2.5	T039,F11
R423M	423.220	±75	2.5	T039,F11
R426M	426.062	±75	2.5	T039,F11
R433.42M	433.420	±75	2.5	T039,F11
R433M	433.920	±75	2.5	T039,F11
R447M	447.625	±100	2.5	T039,F11
R479M	479.500	±150	2.5	T039,F11
R857.65M	857.650	±250	2.5	T039,F11
R868M	868.000	±250	2.5	T039,F11
R868.35M	868.350	±250	2.5	T039,F11
R868.95M	868.950	±250	2.5	T039,F11
R915M	915.000	±250	2.5	T039,F11