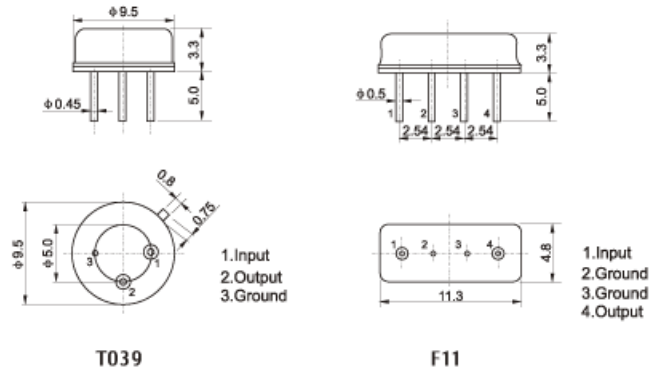


**TWO PORTS SAW RESONATOR**

## 外形尺寸 · DIMENSIONS(mm)


**声表面波谐振器—双端对 · SAW RESONATOR FOR ALARM AND REMOTE CONTROL - TWO PORTS**

PNUMBER 型号	CENTER FREQUENCY (MHz) 中心频率	FREQUENCY TOLERANCE (KHz) 频率精度	INSERTION ATTENUATION (dB) 插入损耗	PACKAGE 封装形式
R224D	224.500	±50	7.5	TO39,F11
R303D	303.825	±100	7.5	TO39,F11
R307D	307.300	±100	7.5	TO39,F11
R335.1D	335.100	±100	7.5	TO39,F11
R315D	315.00	±100	7.5	TO39,F11
R380D	380.000	±100	7.5	TO39,F11
R384D	384.050	±100	7.5	TO39,F11
R391D	391.850	±100	7.5	TO39,F11
R402D	402.550	±100	7.5	TO39,F11
R402D	403.550	±100	7.5	TO39,F11
R414D	414.250	±100	7.5	TO39,F11
R418D	418.000	±75	7.5	TO39,F11
R423D	423.220	±75	7.5	TO39,F11
R433D	433.920	±75	7.5	TO39,F11
R434D	434.020	±75	7.5	TO39,F11
R437D	437.030	±75	7.5	TO39,F11
R447D	447.730	±75	7.5	TO39,F11
R479D	479.500	±75	7.5	TO39,F11
R824.25D	824.250	±250	7.5	TO39,F11
R868.50D	868.500	±250	7.5	TO39,F11